



# GASERA

## Multi-Gas Analyzer: **F10**



Reliable gas monitoring with cantilever  
enhanced photoacoustic technology

**F10**  
GAS ANALYZER

## F10 Concept



The F10 is based on **photoacoustic infrared** technology. It has **pulsed IR source** and 10 distinct spectral bands in the mid-IR region defined by narrow band-pass **optical filters**.

**High sensitivity** is obtained by utilizing the patented cantilever based optical microphone technology.

## Multi-component analysis

**High selectivity** is achieved by choosing up to 10 optical filters with narrow spectral bands for target gases as well as interfering gases. Several spectral regions can be used with each gas for **minimal cross-sensitivity**. Analysis is based on a modified classical least squares fit of sample response to calibration data.

Photoacoustic technology allows high sensitivity from **short optical path length** which has been further improved with novel model-based non-linear compensation. This provides linear **dynamic range of over five orders of magnitude**.

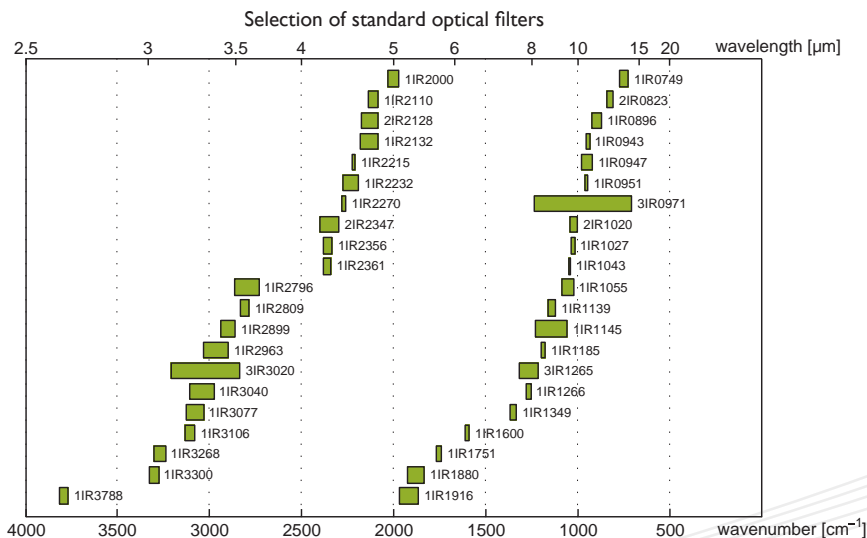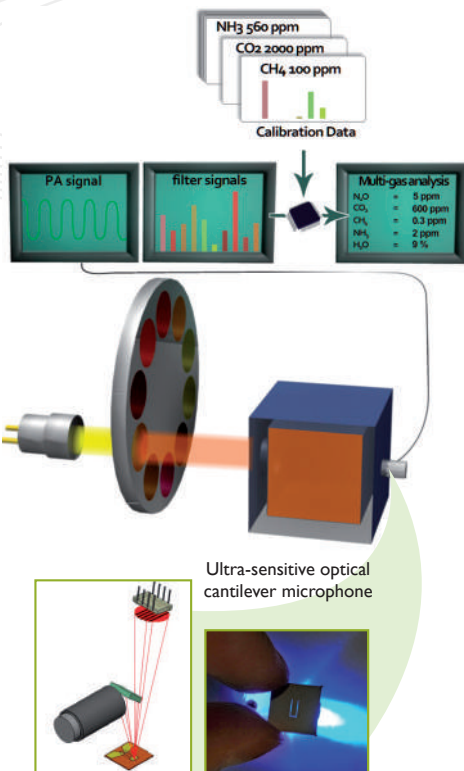

## Features


- Up to 9 gases simultaneously
- Sub-ppm detection limits
- Long calibration period
- User-friendly calibration
- Built in 2-point sampling
- Analysis from very low gas volume
- High-resolution graphical display with user-friendly menus
- Versatile programming of measurement tasks
- Presentation of the measurement results of all gases both numerically and in graphical form
- Built in trend view for monitoring tasks, no external computer required
- No consumables

## Applications

- Poultry, Swine, Agricultural
- Greenhouse gas
- Industrial safety and hygiene
- Fermentation
- Leak detection
- Process control
- Waste anesthetic gases

## Measurable gases

- Hydrocarbons: CH<sub>4</sub>, C<sub>2</sub>H<sub>6</sub>, C<sub>2</sub>H<sub>2</sub>, C<sub>2</sub>H<sub>4</sub>, etc.
- Inorganics: CO<sub>2</sub>, CO, N<sub>2</sub>O, SO<sub>2</sub>, NO, NO<sub>2</sub>, NH<sub>3</sub>, NF<sub>3</sub>, SF<sub>6</sub>, H<sub>2</sub>O
- VOCs: acetone, ethanol, methanol, benzene, toluene, xylenes, formaldehyde etc.
- CFCs and PFCs: CF<sub>4</sub>, C<sub>2</sub>F<sub>6</sub>, R-134a, R 13, etc.
- Corrosives (at low levels): HF, HCl, HCN
- Anesthetics: isoflurane, sevoflurane, desflurane, enflurane

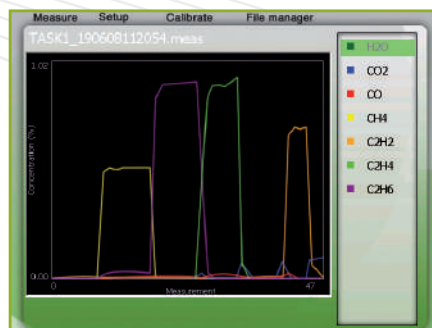

Measure Setup Calibrate File manager			
H2O	=	0.50	%
CH4	=	433	ppm
CO2	=	35.0	ppm
NH3	=	122	ppm
N2O	=	1.23	ppm
CO	=	59.0	ppm
C2H5OH	=	11.0	ppm

## Technology

- Photoacoustic infrared spectroscopy with cantilever enhanced optical microphone
- Electronically pulsed IR source
- Gold coated gas cell stabilized to 50 °C temperature
- Patented ultra-sensitive optical microphone based on a MEMS cantilever sensor coupled with a laser interferometer to measure microscopic movement of the cantilever sensor
- 19" 3U housing for both table stand and rack mount installation
- Built in PC computer with 5,7" color VGA display in the front
- User interface of setting the alarm levels for concentrations of gases under monitoring
- Data storage capacity of approx. 2 GB. Sufficient for more than a year of continuous monitoring of 9 gases with the shortest sampling interval.
- Transfer of measurement results to memory stick via USB or to PC via USB, Ethernet or serial ports.
- Four gas connections in the rear. The two sample gas lines, are equipped with filters for dust and small particles.
- Compensation of the fluctuations of temperature and pressure within the operational conditions
- Cross-compensation of known interferences of the sample gas including water vapor

## General

- Dimensions: 48,4 cm W x 13,9 cm H x 40,5 cm D (19,1 in W x 5,5 in H x 16,0 in D)
- Weight: Approx. 13 kg
- Total internal gas volume: 30 ml
- Gas connections:
  - Push-in connector for 6/4 mm tubing
- Electrical connections:
  - Input voltage: 100 - 240 Vac, 50 - 60 Hz
  - Input power: 100W
  - Interface: Ethernet, USB 1.2, RS-232, and RS-485

## Sales package content

- F10 multi-gas analyzer
- Optical filters for the application installed
- Particle filters for the incoming gas
- Power cord
- User manual

## Environment

- Operational conditions:
  - Temperature range: 0 °C – +45 °C
  - Humidity range: Below 90% RH, non-condensing
  - Pressure range: Ambient level
  - Dust/water resistance: IP20 (IEC 529)
  - Shock/vibration endurance: Strong vibrations at 33 Hz frequency can affect the detection limit
- Storage conditions:
  - Temperature range: -20 °C – +60 °C
- Sample gas conditions:
  - Temperature: 0 – +49 °C, non-condensing
  - Pressure: 930 mbar – 1100 mbar
  - Moisture: Dew point +8 °C or higher
  - Gas flow: Approx 1 liters/minute
  - Particulates < 1 µm

## Measurement specifications

- Response time: Dependent on the channel integration time (C.I.T.) and the gas exchange period defined. Typically from 30 seconds to few minutes.
- Detection limit: Gas dependent. Typically in the sub-ppm region.
- Dynamic range: Typically 5 orders of magnitude (i.e. 100 000 times the detection limit)
- Zero drift: ± Detection limit per 1 month
- Span drift: 3% of measured value per 1 month
- Repeatability: 1% of measured value in operational conditions at the calibration concentration
- Accuracy: Same as the calibration gas accuracy at the calibration concentration. Typically 2-5%.
- Temperature stability: Ambient temperature change within the operational temperature range will not cause drift
- Pressure stability: Sample gas pressure change within the pressure range will not cause drift

## Standards

- Complies with the following standards or other standardization documents under the Low Voltage Directive 2006/95/EC and EMC Directive 2004/108/EC: EN 50270: 2006, EN 61000-3-2: 2006, EN 61000-3-3: 1995 + A1: 2001 + A2: 2005, EN 61010-1: 2001
- Complies with the following safety standards: EN 61010-1 (2001), IEC 61010-1 (2001), CAN/CSA-C22.2 No. 61010-1 (2004) and UL 61010-1 (2004 incl. rev. 2005)

Gasera Ltd. reserves the right to change specifications without notice.